


Gas Detector GLD 0305



Gas Equipment

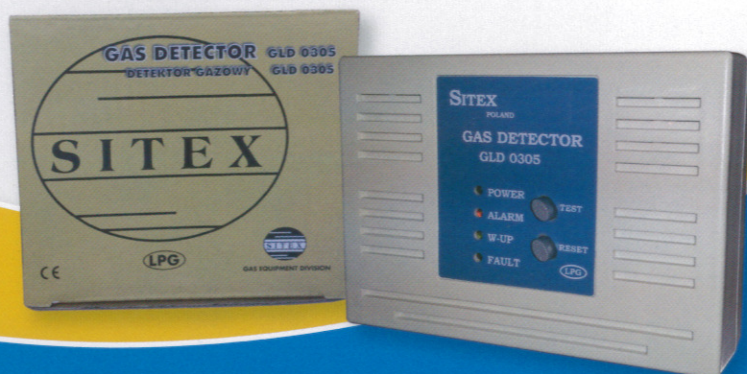

Description



SITEX gas detector GLD 0305 (Compact Version) is wall mounted model with solenoid valve control relay. Continuously detecting the concentration of combustible gases with audio & visual alarm.

SITEX gas detector is fully complying with PN-EN 50194:2000 standard and approved by official European TPI Central Mining Institute and Abu Dhabi Civil Defense.

Technical Parameters (Compact Version)

Supply voltage:	AC240V 50Hz
Solenoid valve control relay:	Max 8A, 250V
Relay contact capacity (max):	Max 8A, 250V
Protection category:	IP42
Insulation:	Class II
Installation:	Wall-mounted
Environment of application:	Household or similar
Operating temperature:	0°C ~ 55°C
Operating humidity:	< 95 % without dew
Types of gas detected:	Natural Gas or LPG
Alarm level:	Methane: 5000ppm ± 1500ppm; Propane: 2200ppm ± 500ppm
Sensor warm-up time at power-on:	<130s ± 20s
Dimensions and weight:	l x w x h, mm : 85 x 120 x 45 ≤ 280 g
Reference standard:	PN-EN 50194:2000 EN 50194:1999

Outline and mount dimensions

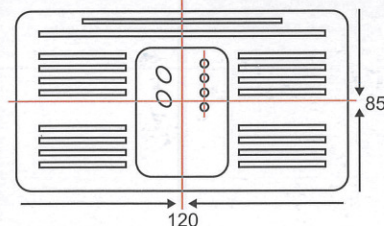

**Produced by Henan in China
exclusively for SITEX Poland**



Exclusive Agent for UAE & Gulf

INTERNATIONAL GAS SERVICES EST.
P.O. Box: 3376, Abu Dhabi, United Arab Emirates.
Tel.: +971 2 673 2626 Fax: +971 2 673 2627
Email: sergas@eim.ae

30-107 Krakow, Poland Plac na Stawach 1
Tel.: +48-12-4267880, Fax: +48-12-4267882
E-mail: sitex@sergas.com Website: www.sitex-polska.com

www.sergas.com